


Zento S-170 RF-AFT TRx ISH

RF - Alternating Field Technology TRX, Internal Shielded

Remote Management
Available

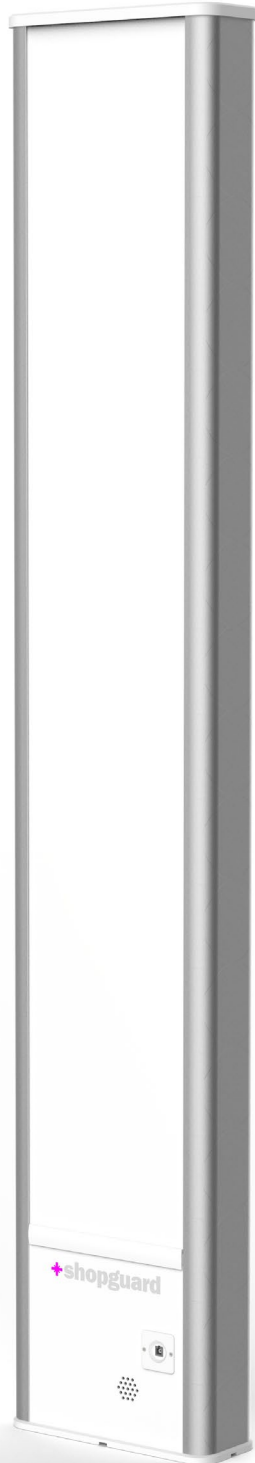

General Info

Family	Zento				
Body Size	Front			Side / Thickness	
	Slim	Normal	Large	Normal	Thick
Type	Radio Frequency (RF), TRx				

Performance	metric	imperial
Maximum distance*	1,6m	62.99in
Detection dist. on side*	shielded	shielded
Dimension		
Height	1,728m	68.03in
Width	0,306m	12.05in
Depth (thickness)	0,116m	4.57in
Approx. weight	14kg	30.86lbs
Electrical Requirements		
PSU	18V AC	
Power Consumption	350mA / 6,3W	
Max. Power Cons.	400mA	
Operating Temp.	0 - 40 °C	32 - 104 °F
Frequency Technology		
Technology	Radio Frequency (RF)	
Frequency Range	8.2MHz	

Other

Antenna Safety	CB, UL/cUL
Emissions Safety	FCC/IC, CE
Materials Used	anodized aluminium frame, acrylic insert
Available Colours	white as default, any colour available

*detection distance may vary, depends on **environment** and **tag type**. Reference data is based on 4x4 paper label tag test

RF - Tx/Rx

RF - Alternating Field

AM - Acousto Magnetic